
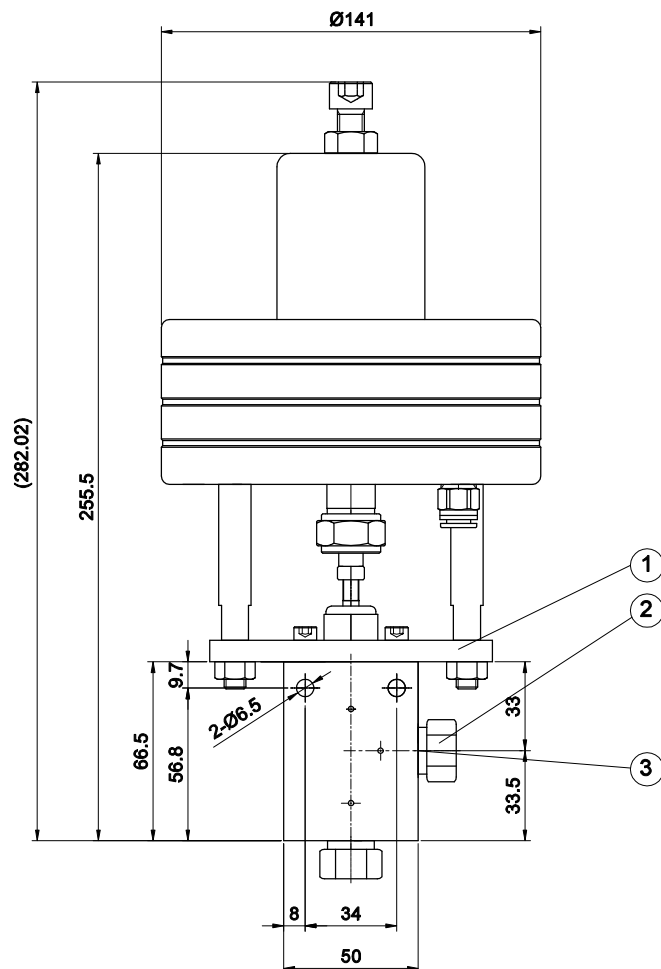





- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material	Block Thickness
AOV60CS06-A	60,000	H6006	2	STS316CW	25

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com							
3	COLLOR	60,000PSI 3/8"	FA60RS06	STS304CW	2	EA			
2	GLAND	60,000PSI 3/8"	FA60GS06	STS304CW	2	EA			
1	A.O.V	60,000PSI 3/8"	AOV60CS06-A	STS316CW	1	EA	-		
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK		
PART CODE		DESCRIPTION		FOR ONE SET					
MATERIAL LIST FOR ONE SET									
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT Air Operating Valve Angle Type					
General tolerance is given in KS B ISO 2768-1				TITLE 60,000PSIG 3/8"					
NOMINAL DIM.(MM)		CLASS OF FINISH		APPROVED BY					
OVER	UNDER	TOL.	✓ = √, 200S, 	APPRO BY	CHKD BY	DET'D BY	DRN BY	WORK NO.	REV. NO.
0.5	6	±0.1		KY.J	KY.J	KY.J	KY.J	HI-KY-J-211028-01	
6	30	±0.2	✓ = √, 50S, 	SCALE 1:1 DRN DATE 10, 2021 DWG NO. HI-KY-J-211028-01 					
30	120	±0.3							
120	315	±0.5	✓ = √, 12.5S, 						
315	1000	±0.8	✓ = √, 3.2S, 						
1000	2000	±1.2	✓ = √, 0.8S, 						
OVER 2000		±1.5							

- Note

1. All dimensions for reference only and subject to change.

0	FOR APPROVAL	/			
REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY	DESIGN SECTION