
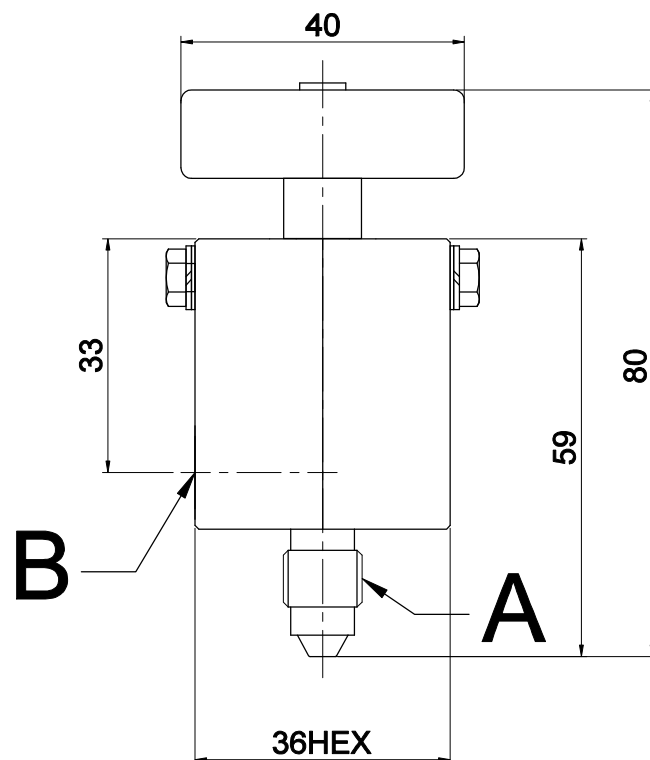




- SPECIFICATIONS

Catalog No.	Connections	Port Type		Material
		A	B	
BLV20VS04	M→F / 20,000PSI 1/4" → 1/8" NPT	H2004	1/8" NPT	STS316CW

- Note

1. All dimensions for reference only and subject to change.

0	FOR APPROVAL	/			
REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY	
					DESIGN SECTION

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-
1	BLEED VALVE	M→F / 20,000PSI 1/4" → 1/8" NPT	BLV20VS04	STS316CW	1	EA	-
ITEM	NAME OF PART PART CODE	SPEC	Catalog No.	MATERIAL	QUANTITY FOR ONE SET	UNIT	REMARK
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT BLEED VALVE			
General tolerance is given in KS B ISO 2768-1				TITLE M→F / 20,000PSI 1/4" - 1/8" NPT			
NOMINAL DIM.(MM)		CLASS OF FINISH		APPROD BY L.S.J			
OVER	UNDER	TOL	✓ = 0, 200S, ~	CHD BY L.S.J	DET BY L.S.J	DRN BY L.S.J	WORK NO. H-L&J-230007-01
0.5	6	±0.1	✓ = 12, 50S, ▽	SCALE 1:1			
6	30	±0.2	✓ = 12, 12.5S, ▽	DRN DATE 06, 2023			
30	120	±0.3	✓ = 12, 3.2S, ▽	DNG NO. BLV20VS04			
120	315	±0.5	✓ = 12, 0.8S, ▽				
315	1000	±0.8					
1000	2000	±1.2					
OVER 2000		±1.5					