
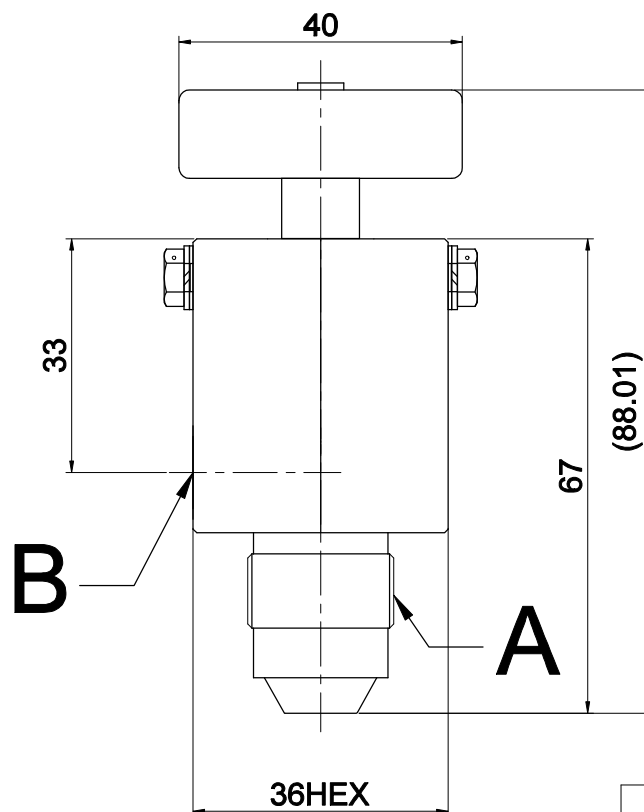




- SPECIFICATIONS

Catalog No.	Connections	Port Type		Material
		A	B	
BLV20VS09	M->F / 20,000PS 9/16" -> 1/8" NPT	H2009	1/8" NPT	STS 316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DESIGN SECTION			
		DRAWING	REVIEWED BY	APPROVED BY	
0	FOR APPROVAL	/			

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	-	-	-	-	-	-	-
2	-	-	-	-	-	-	-
1	BLEED VALVE	M->F / 20,000PSI 9/16" -> 1/8" NPT	BLV20VS09	STS 316CW	1	EA	-
ITEM	NAME OF PART PART CODE	SPEC	Catalog No.	MATERIAL	QUANTITY FOR ONE SET	UNIT	REMARK
MATERIAL LIST FOR ONE SET							
No Indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1		CLASS OF FINISH		TITLE			
NOMINAL DIM.(MM)				M->F / 20,000PSI 9/16" - 1/8" NPT			
OVER	UNDER	TOL		BLV20VS09			
0.5	6	±0.1	✓ = 0.2, 200S, ~	APPROD BY			
6	30	±0.2	✓ = 0.2, 50S, ~	CHD BY			
30	120	±0.3	✓ = 0.2, 12.5S, ~	DET BY			
120	315	±0.5	✓ = 0.2, 3.2S, ~	DRN BY			
315	1000	±0.8	✓ = 0.2, 0.8S, ~	WORK NO.			
1000	2000	±1.2		H-I-L-J-250325-01			
OVER 2000		±1.5		SCALE			
				1:1			
				DRN DATE			
				03, 2025			
				DWG NO.			
				BLV20VS09			
				REV. NO.			
				0			
				HIFLUX®			