
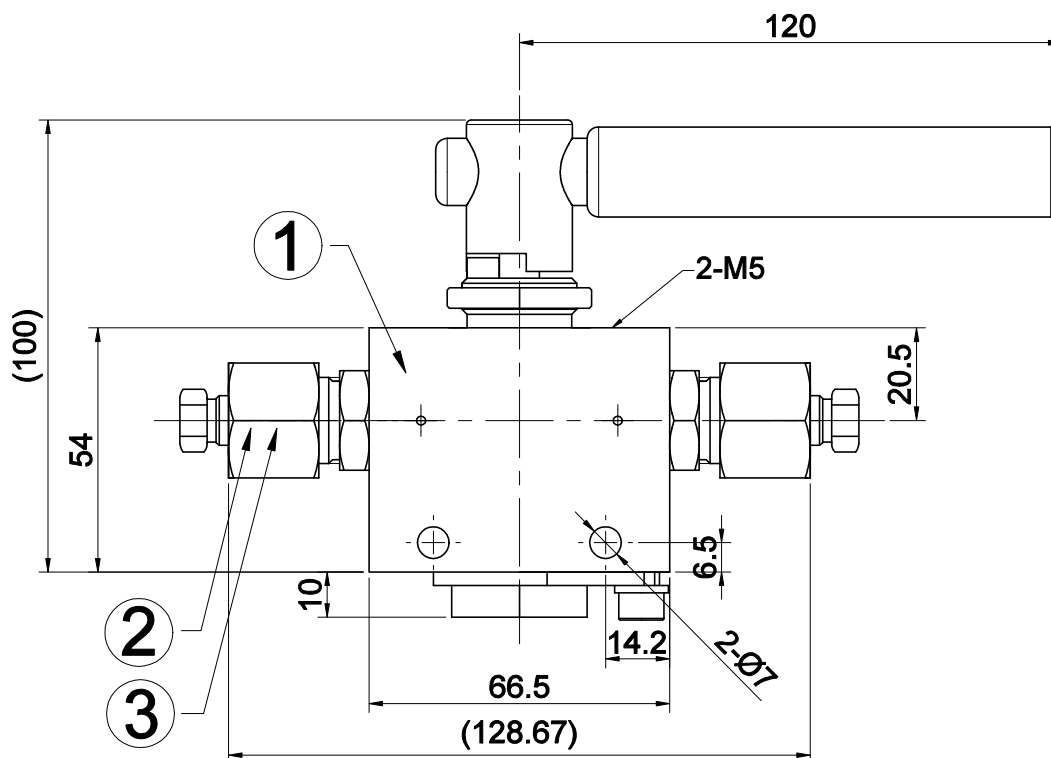




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port Type	Orifice Size(Ø)	Material	Tube Size
BV2003S04-2-90	20,000	H2004	2.8	STS 316CW	1/4"

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	-	-	-
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	20,000PSI 1/4"	FA20RS04	STS 316CW	2	EA	-
2	GLAND	20,000PSI 1/4"	FA20GS04	STS 316CW	2	EA	-
1	ASS'Y	20,000PSI 1/4"	BV2003S04-2-90	-	1	EA	-
ITEM	NAME OF PART PART CODE	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1		NOMINAL DIM.(MM)		2-WAY 90° STRAIGHT TYPE			
OVER		UNDER	TOL.	TITLE			
0.5		6	±0.1	BALL VALVE			
6		30	±0.2	20,000PSIG			
30		120	±0.3	APPROD BY			
120		315	±0.5	CHD BY			
315		1000	±0.8	DET BY			
1000		2000	±1.2	DRN BY			
OVER 2000			±1.5	WORK NO.			
				HI-KYJ-200705-05			
				SCALE			
				1:1			
				DRN DATE			
				07.2023			
				DWG NO.			
				BV2003S04-2-90			
				REV. NO.			
				0			
				HIFLUX®			