
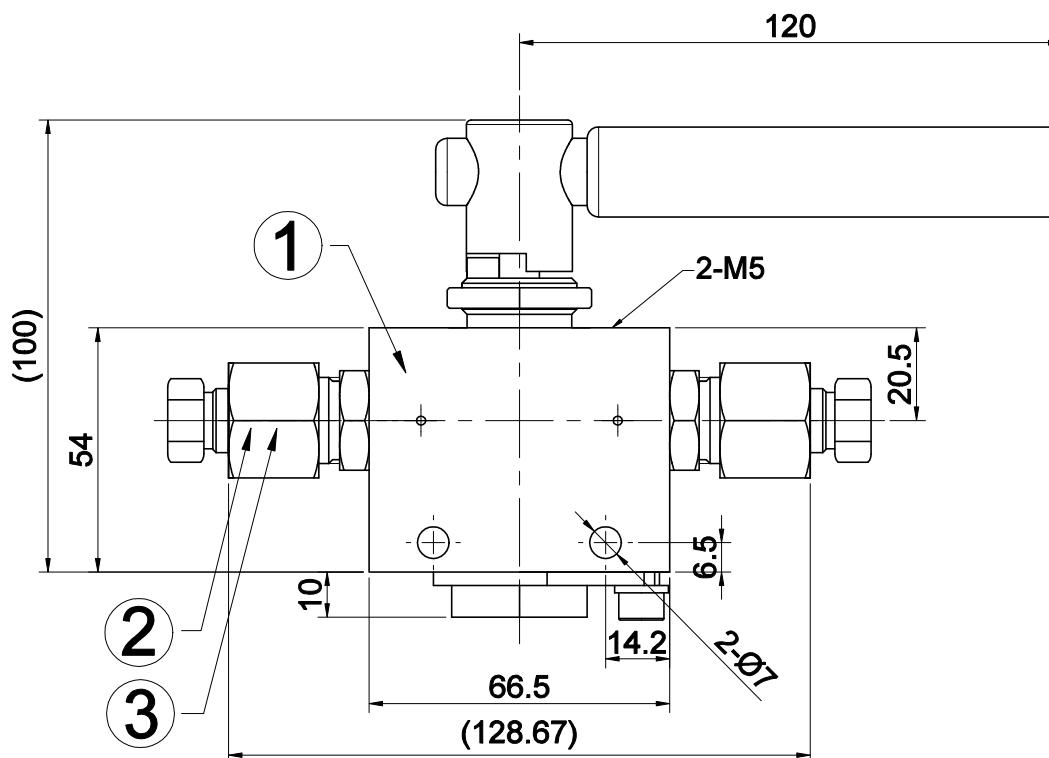




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port Type	Orifice Size(Ø)	Material	Tube Size
BV2003S06-2-90	20,000	H2006	4.8	STS316CW	3/8"

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	-	-	-
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	SLEEVE	20,000PSI 3/8"	FA20RS06	STS 316CW	2	EA	-
2	GLAND	20,000PSI 3/8"	FA20GS06	STS 316CW	2	EA	-
1	ASS'Y	20,000PSI 3/8"	BV2003S06-2-90	-	1	EA	-
ITEM	NAME OF PART PART CODE	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°				UNIT: MM		PROJECT	
General tolerance is given in KS B ISO 2768-1				CLASS OF FINISH		TITLE	
NOMINAL DIM.(MM)				OVER UNDER TOL.		2-WAY 90° TYPE	
				0.5 6 ±0.1		BALL VALVE	
				6 30 ±0.2		20,000PSIG	
				30 120 ±0.3		APPROD BY	
				120 315 ±0.5		CHD BY	
				315 1000 ±0.8		DET BY	
				1000 2000 ±1.2		DRN BY	
				OVER 2000 ±1.5		WORK NO.	
						HI-KY-J-200625-01	
						SCALE	
						1:1	
						DRN DATE	
						06.2025	
						DWG NO.	
						BV2003S06-2-90	
						REV. NO.	
						0	
						HIFLUX®	