
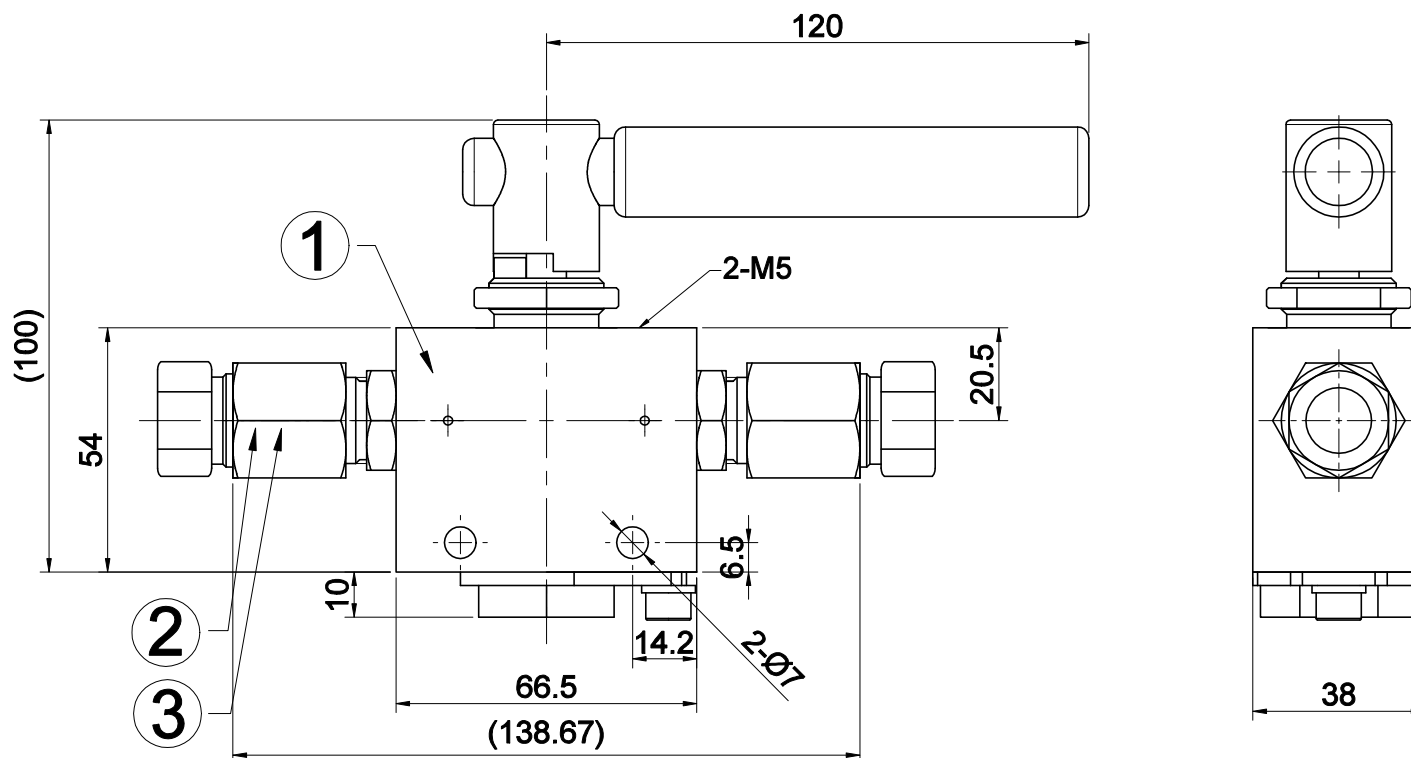




- SPECIFICATIONS

Catalog No.	Pressure Rating(Psi)	Port Type	Orifice Size(Ø)	Material	Tube Size
BV2003S09-2-90	20,000	H2006	4.8	STS316CW	9/16"

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	-	-	-
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	SLEEVE	20,000PSI 9/16"	FA20RS08	STS 316CW	2	EA	-
2	GLAND	20,000PSI 9/16"	FA20GS08	STS 316CW	2	EA	-
1	ASS'Y	20,000PSI 9/16"	BV2003S09-2-90	-	1	EA	-
ITEM	NAME OF PART PART CODE	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°				UNIT: MM			
General tolerance is given in KS B ISO 2768-1				PROJECT			
NOMINAL DIM.(MM)				2-WAY 90° TYPE			
OVER	UNDER	TOL	CLASS OF FINISH	TITLE			
0.5	6	±0.1	✓ = 0.8, 200S, ~	BALL VALVE			
6	30	±0.2	✓ = 1.2, 50S, ▽	20,000PSIG			
30	120	±0.3	✓ = 1.6, 12.5S, ▽	APPROD BY	CHD BY	DET BY	DRN BY
120	315	±0.5	✓ = 2.0, 3.2S, ▽	KY.J	KY.J	KY.J	KY.J
315	1000	±0.8	✓ = 2.5, 0.8S, ▽	SCALE	DRN DATE	WORK NO.	REV. NO.
1000	2000	±1.2		1:1	06.2022	HI-KY-J-220808-01	
OVER 2000		±1.5				BV2003S09-2-90	2

HIFLUX®