
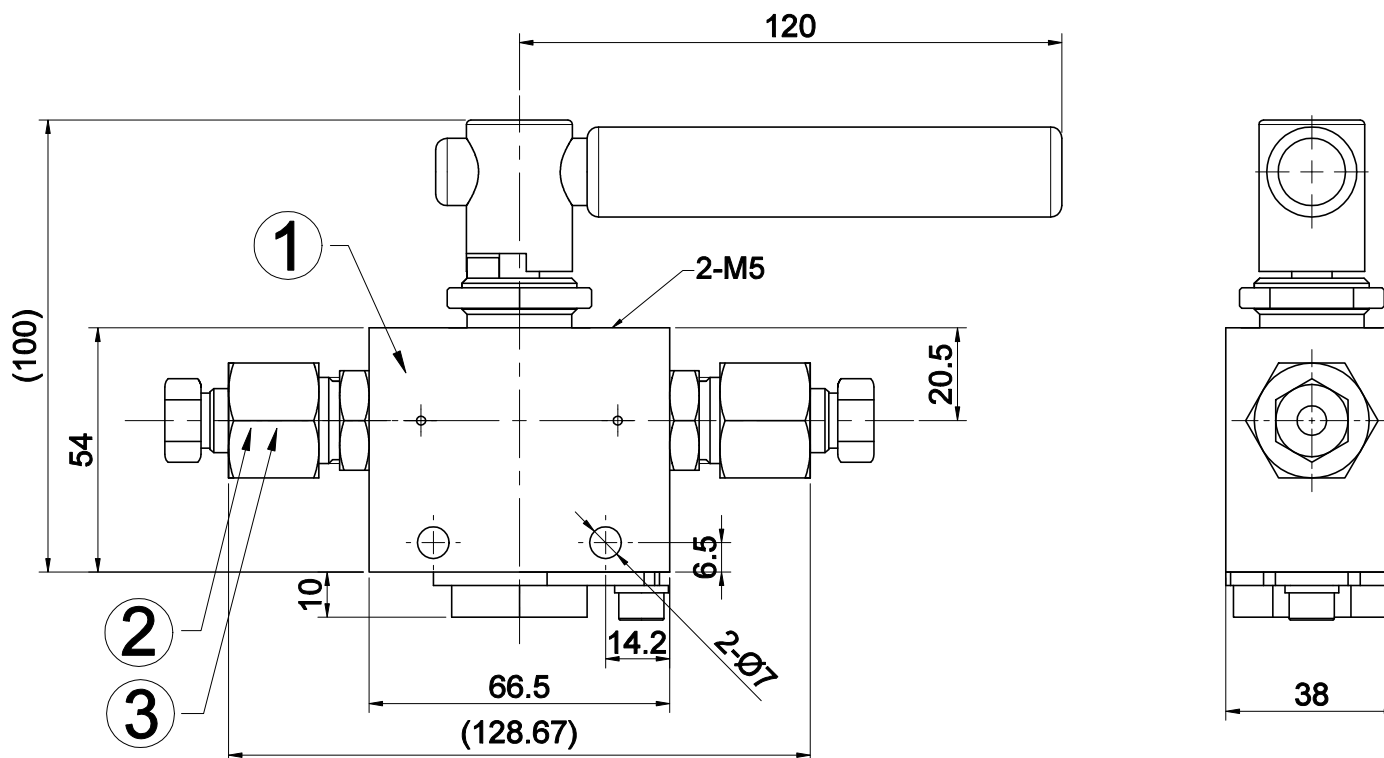




- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port Type	Orifice Size(Ø)	Material	Tube Size
BV6003S04-2-90	20,000	H6004	2.4	STS 316CW	1/4"

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	-	-	-
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mall : http://www.hifluxmall.com					
3	COLLAR	60,000PSI 1/4"	FA60RS04	STS 316CW	2	EA	-
2	GLAND	60,000PSI 1/4"	FA60GS04	STS 316CW	2	EA	-
1	ASS'Y	20,000PSI 1/4"	BV6003S04-2-90	-	1	EA	-
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK
PART CODE		DESCRIPTION		FOR ONE SET			
MATERIAL LIST FOR ONE SET							
No indication chamfer 0.2~0.4 X 45°		UNIT: MM		PROJECT			
General tolerance is given in KS B ISO 2768-1				2-WAY 90° TYPE			
NOMINAL DIM.(MM)		CLASS OF FINISH		TITLE			
OVER	UNDER	TOL.	✓ = , 200S,	BALL VALVE			
0.5	6	±0.1	✓ = , 50S,	20,000PSIG(60,000psi 1/4" Port)			
6	30	±0.2	✓ = , 12.5S,	APPRO BY	CHD BY	DET BY	DRN BY
30	120	±0.3	✓ = , 3.2S,	L.S.J	L.S.J	L.S.J	L.S.J
120	315	±0.5	✓ = , 0.8S,	SCALE	DRN DATE	DWO NO.	
315	1000	±0.8		1:1	01.2024	BV6003S04-2-90	
1000	2000	±1.2		REV. NO.			
OVER 2000		±1.5		1			
				HIFLUX®			