
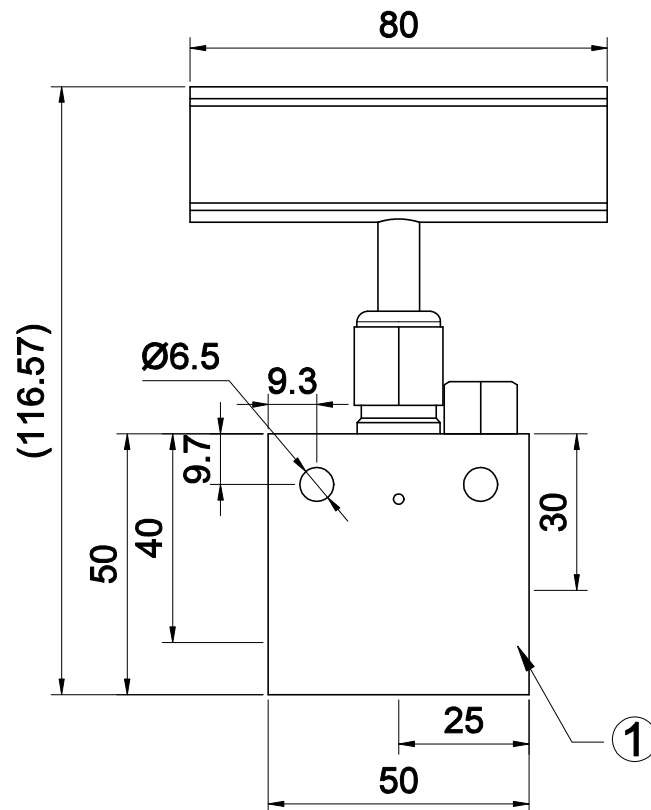




# — SPECIFICATIONS

| Catalog No. | Pressure Rating(PSI) | Port type | Orifice Size(φ) | Material |
|-------------|----------------------|-----------|-----------------|----------|
| NVNR04-S    | 15,000               | 1/4" NPT  | 5.5             | STS316CW |

## — Note

1. All dimensions for reference only and subject to change.

| REV NO.        | DESCRIPTION  | DRAWING | REVIEWED BY | APPROVED BY |
|----------------|--------------|---------|-------------|-------------|
| 0              | FOR APPROVAL | /       |             |             |
| DESIGN SECTION |              |         |             |             |

|                                               |              |                                                                                                                                                            |             |                                   |                      |        |        |
|-----------------------------------------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------------|----------------------|--------|--------|
| Website                                       |              | Main site : <a href="http://www.hiflux.com">http://www.hiflux.com</a><br>Shopping mall : <a href="http://www.hifluxmall.com">http://www.hifluxmall.com</a> |             |                                   |                      |        |        |
| 3                                             | -            | -                                                                                                                                                          | -           | -                                 | -                    | -      | -      |
| 2                                             | -            | -                                                                                                                                                          | -           | -                                 | -                    | -      | -      |
| 1                                             | NEEDLE VALVE | 1/4" NPT                                                                                                                                                   | NVNR04-S    | -                                 | 1                    | EA     | -      |
| ITEM                                          | NAME OF PART | SPEC                                                                                                                                                       | Catalog No. | MATERIAL                          | QUANTITY FOR ONE SET | UNIT   | REMARK |
| MATERIAL LIST FOR ONE SET                     |              |                                                                                                                                                            |             |                                   |                      |        |        |
| No indication chamfer 0.2-0.4 X 45°           |              | UNIT: MM                                                                                                                                                   |             | PROJECT LOW PRESSURE NEEDLE VALVE |                      |        |        |
| General tolerance is given in KS B ISO 2768-1 |              | CLASS OF FINISH                                                                                                                                            |             | TITLE NEEDLE VALVE STRAIGHT       |                      |        |        |
| NOMINAL DIM.(MM)                              |              |                                                                                                                                                            |             | 15,000PSIG 1/4" NPT               |                      |        |        |
| OVER                                          | UNDER        | TOL.                                                                                                                                                       |             | APPD BY                           | CHD BY               | DED BY | DRN BY |
| 0.5                                           | 6            | ±0.1                                                                                                                                                       | ✓ = 20S, ~  | K.Y.J                             | K.Y.J                | K.Y.J  | K.Y.J  |
| 6                                             | 30           | ±0.2                                                                                                                                                       | W = 12S, ▽  | WORK NO. HI-KYJ-202222-04         |                      |        |        |
| 30                                            | 120          | ±0.3                                                                                                                                                       | X = 12S, ▽  | SCALE 1:1                         |                      |        |        |
| 120                                           | 315          | ±0.5                                                                                                                                                       | Y = 12S, ▽  | DRN DATE 02, 2022                 |                      |        |        |
| 315                                           | 1000         | ±0.8                                                                                                                                                       | Z = 12S, ▽  | DWG NO. NVNR04-S                  |                      |        |        |
| 1000                                          | 2000         | ±1.2                                                                                                                                                       | 12S, ▽      | HIFLUX®                           |                      |        |        |
| OVER 2000                                     |              | ±1.5                                                                                                                                                       | 12S, ▽      |                                   |                      |        |        |