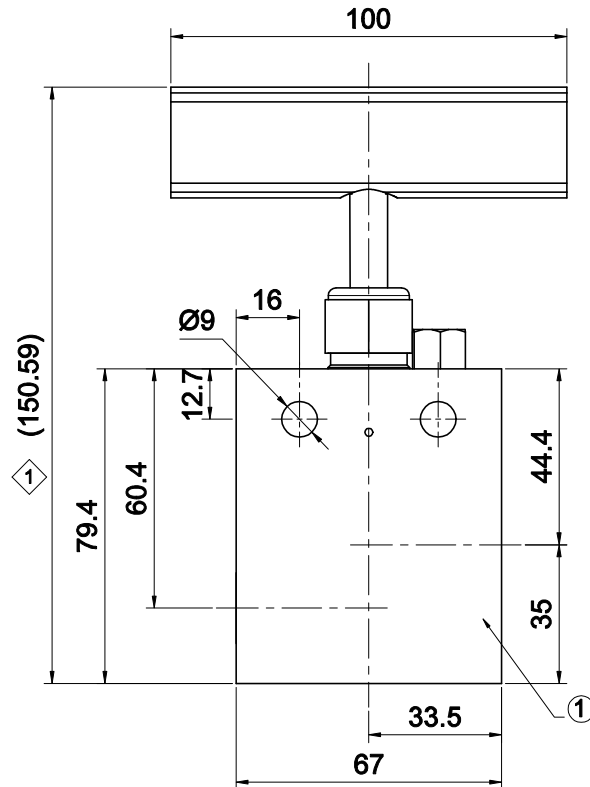



- SPECIFICATIONS

Catalog No.	Pressure Rating(PSI)	Port type	Orifice Size(Ø)	Material
NVNVS08-S	15,000	NPT 1/2"	7.9	STS316CW

- Note

1. All dimensions for reference only and subject to change.

REV NO.	DESCRIPTION	DRAWING	REVIEWED BY	APPROVED BY
0	FOR APPROVAL	/		
DESIGN SECTION				

Website		Main site : http://www.hiflux.com Shopping mail : http://www.hifluxmail.com								
3	-	-	-	-	-	-	-			
2	-	-	-	-	-	-	-			
1	NEEDLE VALVE	1/2" NPT	NVNVS08-S	-	1	EA	-			
ITEM	NAME OF PART	SPEC	Catalog No.	MATERIAL	QUANTITY	UNIT	REMARK			
PART CODE		DESCRIPTION		FOR ONE SET						
MATERIAL LIST FOR ONE SET										
No indication chamfer 0.2-0.4 X 45°		UNIT: MM		PROJECT LOW PRESSURE NEEDLE VALVE						
General tolerance is given in KS B ISO 2768-1		 		TITLE NEEDLE VALVE STRAIGHT						
NOMINAL DIM.(MM)				15,000PSIG 1/2" NPT						
OVER	UNDER	TOL.	CLASS OF FINISH		APPD BY	CHD BY	DED BY	DRN BY	WORK NO.	REV. NO.
0.5	6	±0.1	✓ = 124, 200S, ~		KYJ	KYJ	KYJ	KYJ	14-KYJ-251006-02	
6	30	±0.2	✓ = 124, 50S, ~							
30	120	±0.3	✓ = 124, 12.5S, ~							
120	315	±0.5	✓ = 124, 3.2S, ~							
315	1000	±0.8	✓ = 124, ~							
1000	2000	±1.2	✓ = 124, 0.8S, ~							
OVER 2000		±1.5								
					SCALE 1:1		DRN DATE 10, 2023		DWG NO. NVNVS08-S	
										